


Plan 02

Description: Plan 02 is a dead-ended seal chamber with no recirculation of flush fluid.

Objective: Often used with a jacketed seal chamber to control temperature in high temperature processes. Use only when adequate vapor margin is present in the seal chamber.

Advantages: Little to no maintenance. Process solids are not continuously introduced into seal chamber. Plan 62 with steam can provide additional heating or cooling and minimize coking on hot processes.

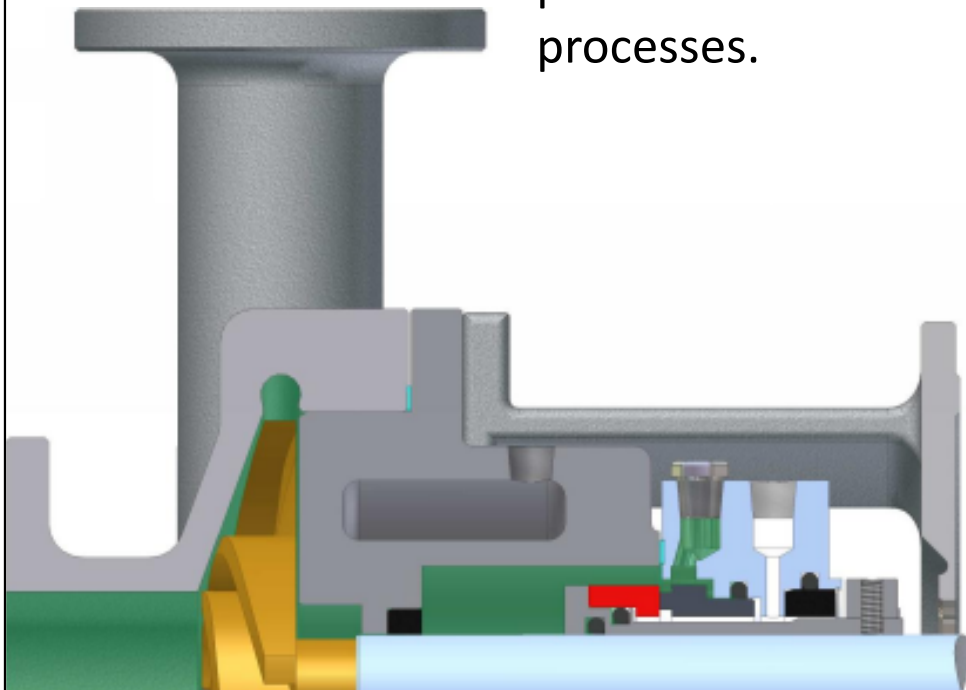

Plan 03*

Similar to Plan 02 but must have an open throat, tapered seal chamber with flow modifiers to create circulation and aid in removal of solids. Helps insure proper flooding, venting and draining of chamber.

