
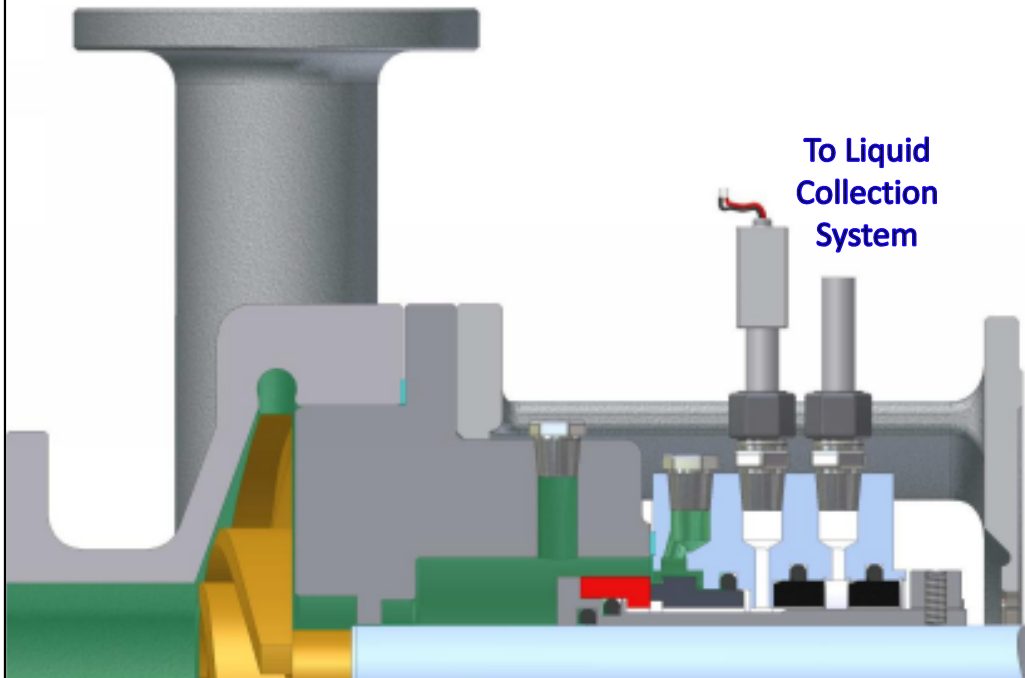


Plan 66A*

Description: Plan 66A is an external drain and an external vent pressure transmitter to detect high level leak rates. Vent and drain are separated by a gland bushing with an additional gland bushing on atmosphere side.

Objective: Early detection and minimize leakage past gland. Typically used on single seals in remote locations and critical processes.

Advantages: More efficient directing leakage to a drain than Plan 66B.

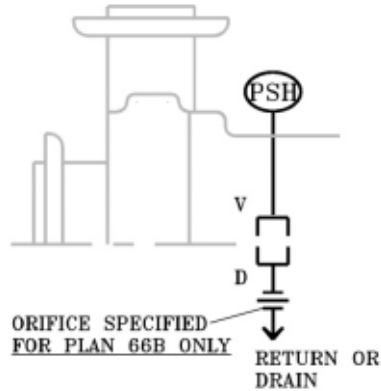

Plan 66B*

Description: Plan 66B is an external drain with orifice and an external vent pressure transmitter to detect high level leak rates on atmosphere side of seal, utilizing a single gland bushing.

Objective: Same as Plan 66A.

Advantages: Can easily adapt to most existing seal glands.

